
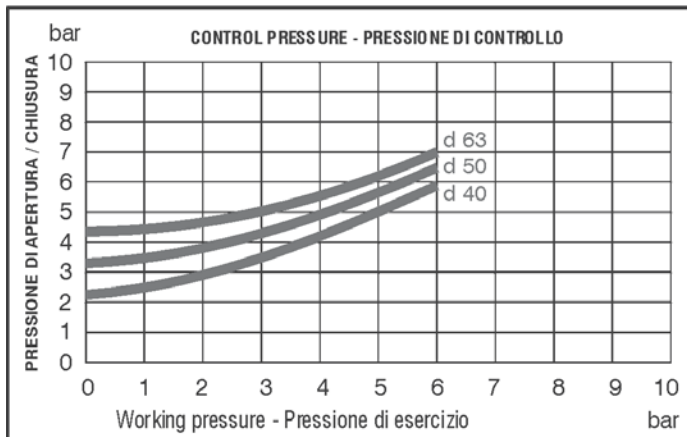



**PNEUMATICALLY ACTUATED
À COMMANDE PNEUMATIQUE
PNEUMATISCH
PNEUMATICA AD AZIONE DIRETTA**

MMD

Plain spigots
Male a collar
Klebestutzen
Attacchi maschio per incollaggio

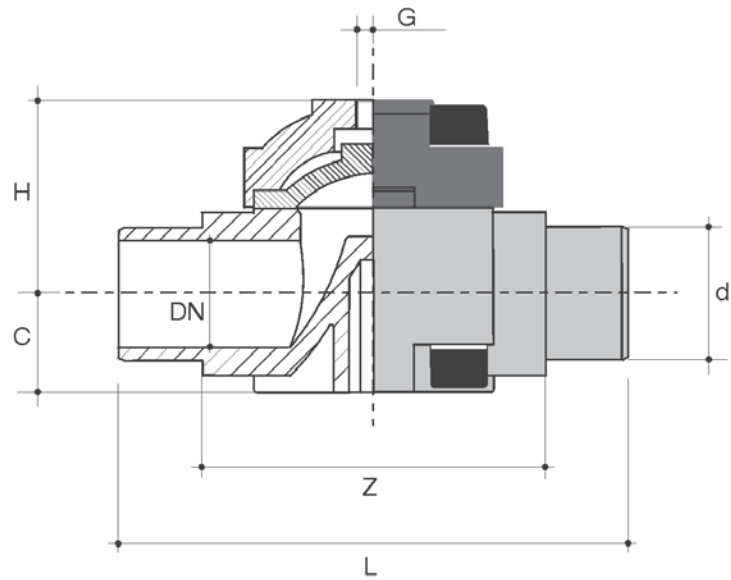

DIMENSIONS - DIMENSIONI			
d	40	50	63
DN	32	40	50
C	38 mm	38 mm	45 mm
G	1/4	1/4	1/4
H	73 mm	73 mm	80 mm
L	204 mm	192 mm	224 mm
Z	150 mm	130 mm	148 mm
Weight	1.100 g	1.150 g	1.700 g

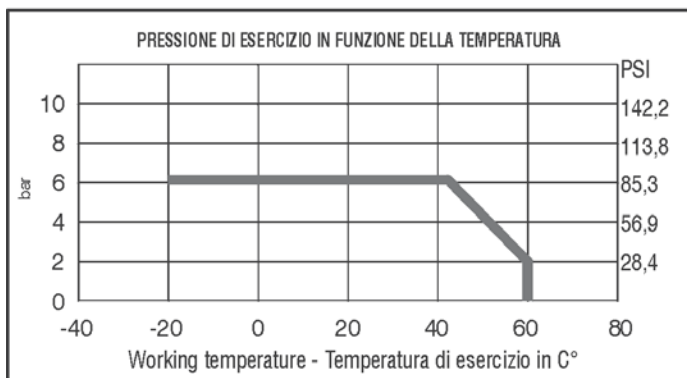

VALORI K_{V100}			
size	40	50	63
K_{V100}	340	490	720
	l/min Ap = 1 Bar H ₂ O 20° C		

MATERIALS: Body in PVC-U - Upper Part in PP - Diaphragm in EPDM reinforced with Nylon net
MATERIAUX: Corp en PVC-U - Couvercle en PP - Membrane en EPDM renforcée par un tissu en Nylon
WERKSTOFF: Gehäuse: PVC-U - hart, Oberteil PP - Abspermembrane: EPDM, Nylonverstärkt
MATERIALI: Corpo in PVC-U - Coperchio in PP - Membrana in EPDM retinato Nylon
 Pressione d'esercizio a 20 °C 10 bar